





Cantilever Liftgate Product Information

Model	Lifting Capacity	Bed Height Min-Max	Platform Size /Steel Width x Depths (in)	Platform Size / Alum Width x Depths (in)	*Shipping Weight (lbs)
LM22	2,200	40"-55"	94 x 59,72,	94 x 59,71,79	825-1276
LM33	3,300	40"-55"	94 x 59,72,86	94 x 59,71,86	1056-1650
LM44	4,400	40"-55"	94 x 71,86,94	94 x 71,86,94	1265-1936
LM55	5,500	40"-55"	N/A	94 x 71,78,82	1265-1309
LM66	6,600	40"-55"	94 x 73,82,92	94 x 73,83,96	1837-2376

* Shipping weights start with smallest aluminum platform to largest Steel. Steel incremental weights are 7 lbs /in of platform, aluminum incremental weights are 2 lbs/in of platform.

Standard Features

- Remote Toggle and passengers side permanent mount controls
- Automatic platform leveling
- Enclosed Weather-Sealed Power Pak in lockable plastic enclosure. Completely encases power unit
- 4 Cylinder system – 2 lift & 2 tilt
- Hydraulic open and close platform
- Fully bushed pivots using no maintenance bushings. No greasing required.
- Steel anti skid platform fully welded
- Nickel/Chrome plated cylinders with protective weather cover
- Shipped fully assembled for fast installation
- Each Cylinder has a hydraulic safety valve to prevent platform dropping in case of hose failure.

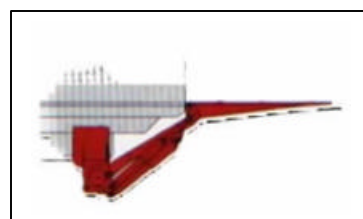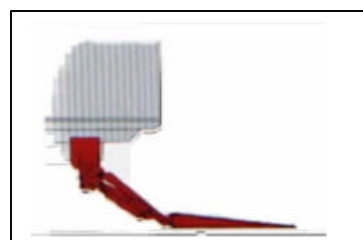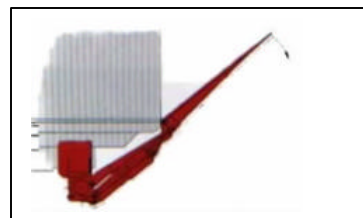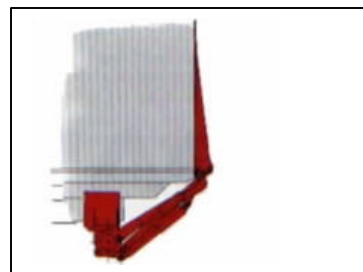

Popular Options

- Roll Stops (for cart retention)
- Non Standard Platform depths and widths
- Flashing warning lights on platform
- Foot activated controls on platform
- Anti-Skid Surface (aluminum platform)
- Reinforced platform to accommodate forklift



Email: info@ultronlift.com - Web: www.ultronlift.com

Ultron Lift Corp
 190 Lewis Street PO Box 6126
 Buffalo, NY 14240-6126
 Phone: 800-289-1335
 716-852-7994
 Fax: 716-854-5424

Ultron Lift Inc.
Les Hayons Ultron Inc.
 12 Industrial Street
 Toronto, ON M4G 1Y9 Canada
 Phone: 416-421-7987
 Fax: 416-421-7927



Aluminum Platform shown is optional

Cantilever Liftgates

LM Series

For the end user who needs to easily handle large, bulky or sensitive loads, the LM series Cantilever Liftgate with its large platform is the ideal choice. Loads are always level regardless of terrain.

Key Features

- Automatic platform leveling is standard on all gates.
- Unique feature of retracted hydraulic cylinders protect against pitting caused by exposure to rain, road salt and stones hitting the shaft, while driving down the road.
- **Hydraulic Power** opening and closing of platform improves cold weather performance.
- Power unit and electrical system is fully protected from the elements in a waterproof non-rusting enclosure.
- Platform seams are fully welded for strength and protection against rusting.
- Shipped fully assembled for fast installation.

- **Lifting Capacity** – 2200, 3300, 4400, 5500, 6000
- **Applications** – straight trucks, trailers, cube or cutaway vans



Retracted Hydraulic Cylinders are protected from damage caused by road debris.

**Call 800-289-1335 in the U.S.
416-421-7987 in Canada**

Visit our web sit: www.ultronlift.com